

UDW3-100 SPECIFICATIONS

The UDW3 is designed for accurate underwater force measurement. The body of the load cell is manufactured from heat treated 17-4 PH stainless steel. The mounting surfaces are equipped with threaded holes, and the unit is sealed and filled with mineral oil. A pressure compensation bladder is used to equalize the internal and external pressures. This allows operation underwater with little effect on the force and moment outputs due to water pressure.



Units: Capacity:

Dimensions(LxDia)	88.9 x 75.44 mm	IP Rating	IP68 *
Weight	2.05 Kg.	Sensing elements	Strain gage bridge
Channels	Fx, Fy, Fz, Mx, My, Mz	Amplifier	Required
Body Material	Stainless Steel	Analog outputs	6 Channels
Temperature range	-17.78 to 51.67°C	Digital outputs	None
Excitation	10V maximum	Crosstalk	< 2% on all channels
Fx, Fy, Fz hysteresis	± 0.2% full scale output	Fx, Fy, Fz non-linearity	± 0.2% full scale output

Channel	Fx	Fy	Fz	Units	Mx	My	Mz	Units
Capacity	222	222	445	N	11	11	5.6	N-m
Sensitivity	5.4	5.4	1.35	µv/v-N	266	266	213	µv/v-N-m
Natural frequency	-	-	-	Hz	-	-	-	Hz
Stiffness (X 105)	21.04	21.04	298	N/m	-	-	0.0226	N-m/rad

Resolution *To determine the resolution of your system, please use our [Output Calculator](#).*

Notes: * The transducer is tested in potable tap water at a pressure of 100 psi (690 kPa) and a temperature of 70°F (21°C) for 8 hours. Any use exceeding these conditions will void the warranty.

Published specifications subject to change without notice.

Last modified:2018-03-22


TECHNICAL DRAWINGS

Footprint Drawing (click on image to enlarge)


Electrical Drawing (click on image to enlarge)





TECHNICAL DRAWING

Footprint Drawing

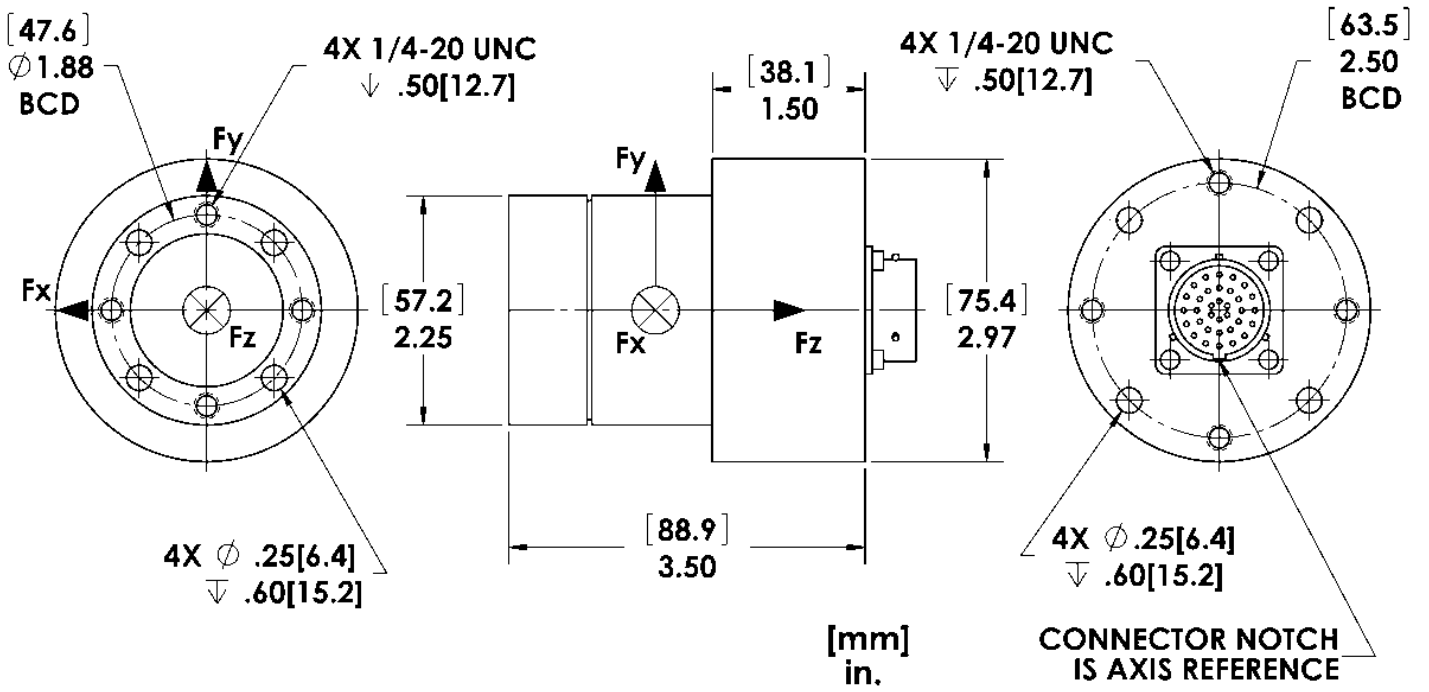

Electrical Drawing

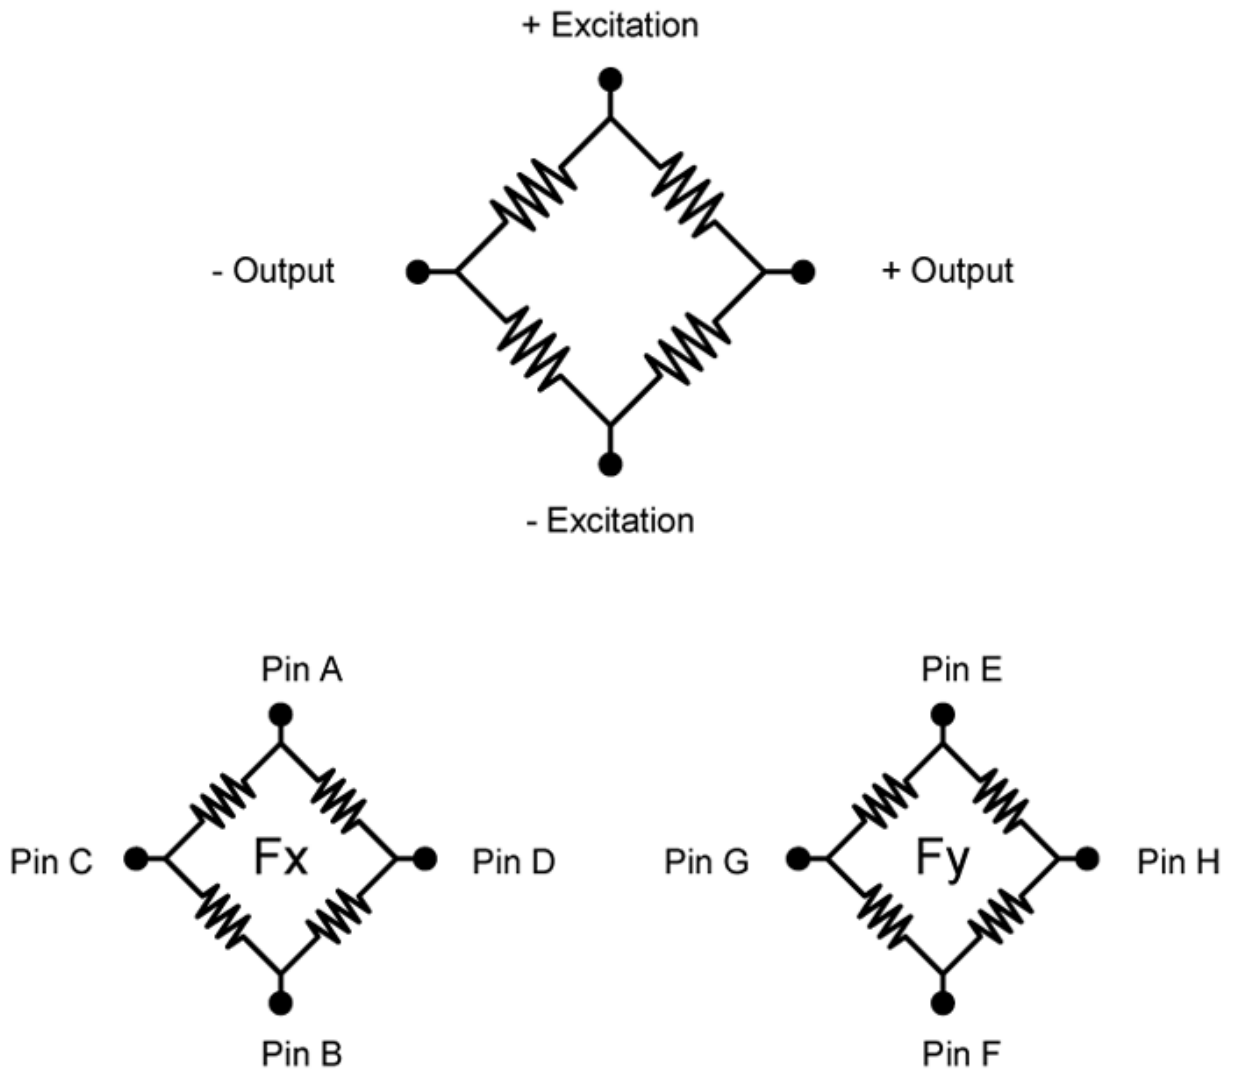

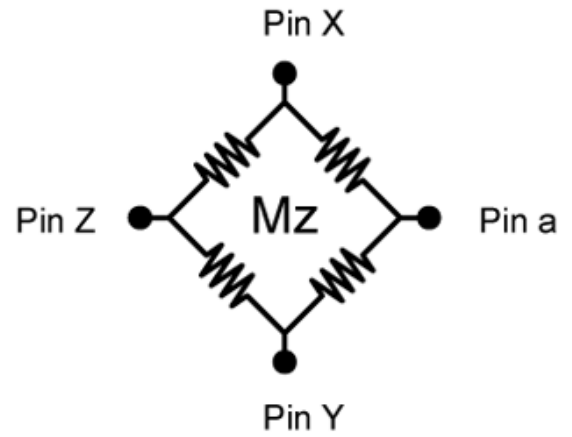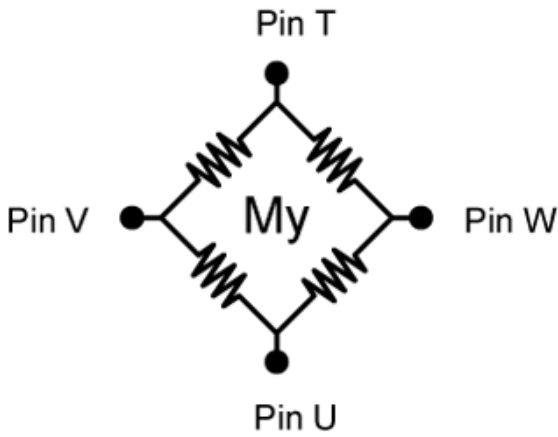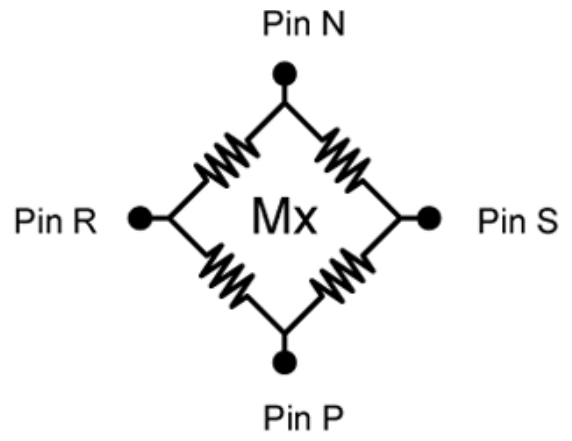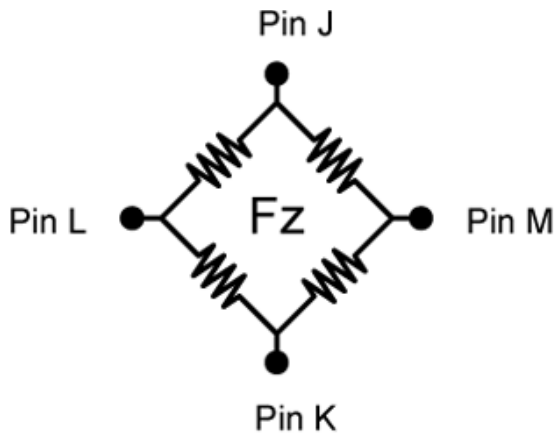

Bridge $F_z = 700$ ohms
 Bridges F_x ; F_y ; M_x ; M_y ; $M_z = 350$ ohms
Connector Type:
 Souriau 851-02E16-26P50-44

© Advanced Mechanical Technology, Inc.

176 Waltham Street, Watertown, MA 02472-4800 USA

1-617-926-6700