

TEA110 Series

Test and Measurement Accelerometer, 100mV/g, Side Exit, 10-32
Coaxial Connector, 10-32 Mounting



Actual Product Size Shown




Product Features

- ▶ General Purpose Test & Measurement Accelerometer
- ▶ Lightweight Titanium Case
- ▶ 10kHz (±5%) Frequency Response

TEA110

Coaxial Connector


Connector Pin	Polarity
Center	(+) Signal/Power
Shell	(-) Common



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TEA110		Environmental		
Sensitivity (±10%)		100 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	30-1,800,000 CPM	0.5 Hz-30 kHz	Maximum Shock Protection		10,000 g. peak
Frequency Response (±10%)	30-900,000 CPM	0.5 Hz-15 kHz	Electromagnetic Sensitivity		CE (Pending)
Frequency Response (±5%)	30-600,000 CPM	0.5 Hz-10 kHz	Sealing		Welded, Hermetic
Dynamic Range		± 50g. peak	Physical		
Non-Linearity		≤ 1%	Sensing Element		PZT Ceramic
Transverse Sensitivity		≤ 5%	Sensing Structure		Shear Mode
Electrical			Weight	0.35 oz	10 grams
Settling Time		< 2 Seconds	Case Material		Titanium
Voltage Source (IEPE)		18-30 VDC	Mounting		10-32 UNF
Constant Current Excitation		2-20 mA	Connector		10-32
Spectral Noise @ 10 Hz		30 µg/√Hz	Resonant Frequency	2,640,000 CPM	44 kHz
Spectral Noise @ 100 Hz		4 µg/√Hz	Calibration Certificate		CA12 Step Calibration
Spectral Noise @ 1000 Hz		2 µg/√Hz			
Output Impedance		< 100 ohm			
Bias Output Voltage		10-14 VDC			
Case Isolation		Case Ground			

Typical Frequency Response

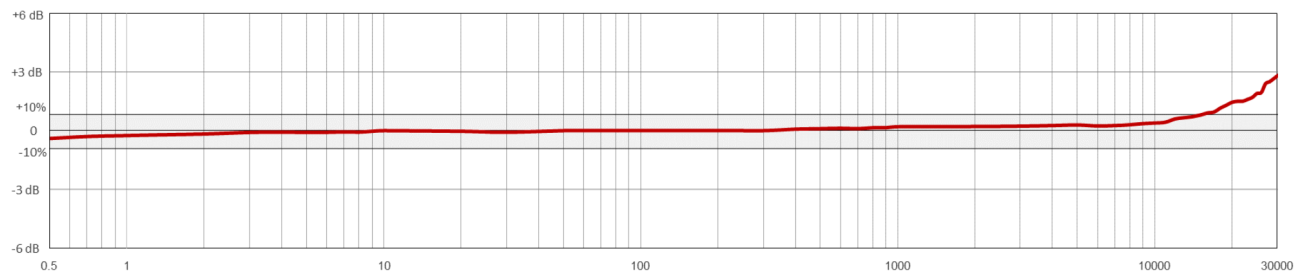

Five Year Standard Product, Two Year Custom & Private Labeled Product Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900